

PLRCIT2 Series

Vaportite Unit

This fully weatherproof T5 or T8 unit is designed for use in areas of wet location. Designed to withstand direct contact with rain this unit is corrosion resistant and waterproof. This unit is ideal in areas such as car washes, store fronts, parking garages, kitchens, and chemical plants. Vapor Tite unit is capable of being hosed down for easy cleaning.

Construction: Exterior housing is designed for single piece injection molded fiberglass/plastic combination blend. Neoprene gasket and stainless steel pressure locks ensure waterproof seal. Interior gear tray is heavy gauge die formed steel which hinges to allow electrical raceway access while remaining attached to luminaire housing during installation and maintenance.

Electrical: All units are furnished with UL Listed Class P thermally protected ballast. Other voltages are available upon request. Fixtures meet requirements for UL Luminare Standard # 1598. All units comply with National Energy Standard. All units are UL certified damp and wet location M 59006648

Mounting: Vapor Tite Unit available with an stainless steel external hanging bracket. VT Series is watertight and must be drilled and sealed for each surface mounting or chain hanging application.

WARRANTY & LISTINGS:

- 5-year warranty of all electronics and housing.
- UL Certified for damp and wet location M 59006648



Buy American Act
COMPLIANT

Ordering Guide

PLRCIT2

Series

of Lamps

Lamp Size

Ballast Type

Options

PLRCIT2

1 M

2 M

3 M

Vaportite

21

Vaportite

22

Vaportite

23

T8

32 = ØHGVi

59 M206T8

86 = F96T8/HO

T5

14 = F14T5

28 = F28T5

T12

24 = F20T12

40 = F40T12

96 = F96T12

96HO = F96T12/HO

NB = Non-Ballasted

SET LED N = Wired 1 end hot for LED tubes

SET LED NS = Wired 2 ends hot for LED tubes

W/LEDIF = LED ballast driven tubes

EMBA = External Occupancy Sensor

2BAL = 2 ballasts

REFS = Silver Reflector

OCC-E = External Occupancy Sensor

OCC-I = Internal Occupancy Sensor

BILEVEL = Bi-level system


SS = Stainless Steel Latch

POLY = Polycarb lens



Mounting Brackets Included

DIMENSIONS

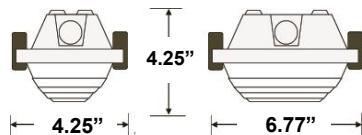

T8	T5	T5HO	Length
F17T8	F14T5	F24T5	28"
F32T8	F28T5	F54T5HO	52"
Tandem 4' Tubes			
FF32T8	F28T5	F54T5HO	100"
8 ft Tubes			
T8	T8HO	Length	
F96T8	F96T8HO	100"	

RF	20									
	80%				70%				50%	
RC	70	50	30	10	70	50	30	10	50	30
0	109	109	109	109	107	107	107	107	101	101
1	98	93	89	84	95	91	86	83	86	83
2	89	80	73	67	86	78	72	66	74	69
3	81	70	62	56	78	68	61	55	65	59
4	74	62	53	47	71	60	52	46	57	51
5	67	54	45	39	65	53	45	38	50	43
6	61	48	39	33	59	47	39	33	45	38
7	56	43	35	29	54	42	34	28	40	33
8	52	39	30	25	50	38	30	24	36	29
9	48	35	27	21	46	34	25	21	32	25
10	44	31	24	19	43	31	23	18	30	23

Max weight = 15lbs / 48" 32lbs / 96"

